

TDA1400NG


TDA1400 NG - 3G

TDA14XXNG

Designed to be embedded in the CD and ATS security control panels. It brings all the benefits and cost savings of alarm via IP and IP with 3G back-up to the market. And the unique touch screen makes commissioning simple and day-to-day interaction just as straightforward.

IMPORTANT NOTE:

The monitoring centres must support the TDA14XXNG with the Chiron IRIS Secure Apps.

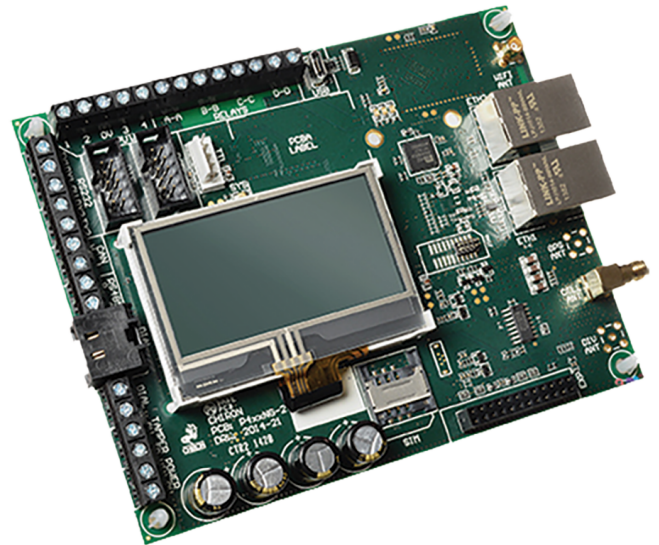

Details

- Multi language Touch Screen for super easy installation
- Communications via 3G
- Connects to every panel via PSTN for 3G alarm reporting (SIA/CID)
- ATS + 1801 serial alarms to 3G
- CD + MPI 232/RD62xx serial alarms to 3G
- ATS + 1801 U/D over IP/3G to Titan
- CD + MPI232 U/D over IP/3G to WinTPC
- Alarm reporting over 3G to IRIS Secure Apps receiver
- 4 pin inputs which can be extended to 16 via daughter board (IRIS-EXT1)
- 4 remote controlled output
- SMS messaging and control
- EN 50131 and EN 50136 Grade 4 ATS 6 compliant
- Configuration via USB or touchscreen
- Polling range from 10 seconds to 7 days
- CAN bus
- VOIP & SIP services

TDA1400NG

TDA1400 NG - 3G

Technical specifications

Generale

Linee prodotto	Advisor Advanced, ATS Master, CD, CS
----------------	--------------------------------------

Network

Tipo di comunicatore	Cellulare
----------------------	-----------

Reporting

Protocolli di segnalazione	Contact ID, Fast Format, Robofon, SIA
----------------------------	---------------------------------------

Ricevitori supportati	IRIS Secure Apps (Chiron)
-----------------------	---------------------------

Interfaccia

Ethernet	---
----------	-----

Antenna	Si, incluso
---------	-------------

Elettrico

Valore di alimentazione	9 to 28 VDC
-------------------------	-------------

Fisico

Dimensioni fisiche	150 x 110 mm
--------------------	--------------

Peso netto	300 g
------------	-------

Alarm Dialer Interface

	Two wire interface via RJ11 socket
	40V feed at 12m
	Ringing voltage 40V P-P to REN4 for incoming calls
	Off hook detection with dial-tone presented to alarm dialer
	DTMF tone recognition for dialling outgoing calls and alarm signaling

GSM/3G interface

	Quad band GSM 850/900/1800/1900 MHz
	MMCX socket for antenna connection

IP

	TCP ports (outbound): 51292 (diagnostics), 52737 (polling), 53165 (alarms)
	UDP ports for upload/download 8738 and 8739

PIN Input

Max input voltage	0V to +24V
-------------------	------------

Input Low threshold	<1V
---------------------	-----

Input High threshold	>2V
----------------------	-----

Relay Output

Max operating voltage	24V DC
-----------------------	--------

Max current	100mA DC
-------------	----------

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 18 August 2020 - 11:39

